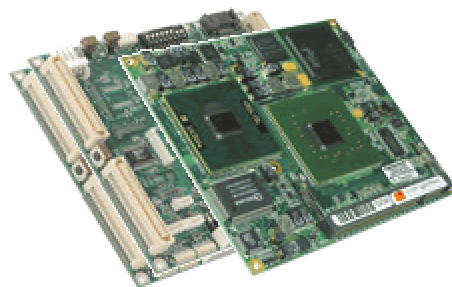

mini-XTX SBC
conga-X915
SMALLEST XTX SBC AVAILABLE ON THE MARKET
Lowest Price
PRELIMINARY

Product Description

This small form factor XTX SBC is the same size (**95 x114 mm**) as a XTX module. It can easily be expanded by adding available SATA +USB expansion, mini-PCI Type III, PCI Express mini, Express/34, PCI/104-Express, and prototyping add-on adapters with standard available I/O cards. Heatsinks and Heatspreaders are available for easy thermal design integration.

The **mini-XTX SBC** combined with available mini-I/O cards provides a means to quickly implement an embedded computer application with:

- Small form factor that is the same size as a XTX Computer-On-Module
- Expandable by adding available adapters and standard I/O cards
- Modular embedded computer solution without a backplane
- Large selection of CPUs / Memory to meet your price/performance objectives
- Heatsink or Heatspreader available for easy thermal design integration
- Can be easily modified with custom add-on cards for applications that require custom circuitry to be added
- Custom I/O design service also available



Mini-XTX SBC shown with one adapter module

Ordering

PCI_915.745	mini-XTX SBC 915/745	- Intel 915GM chipset/ Intel Pentium M 745 CPU with 1.8 GHz, 2 MB L2-Cache and 400 MHz FSB/ 512MB RAM
PCI_915.738	mini-XTX SBC 915/738	- Intel 915GM chipset/ Intel Pentium M 738 CPU with 1.4 GHz, 2 MB L2-Cache and 400 MHz FSB/ 512MB RAM
PCI_915.373	mini-XTX SBC 915/373	- Intel 915GM chipset/ Intel Celeron M 373 ULV CPU with 1.0 GHz, 512KB L2-Cache and 400 MHz FSB/ 512MB RAM
PCI_915.CM800	mini-XTX SBC 915/CM800-0	- Intel 915GM chipset/ Intel Celeron M LV CPU with 800 MHz, 0KB L2-Cache and 400 MHz FSB/ 512MB RAM
PCI_915.CM600	mini-XTX SBC 915/CM600-5	- Intel 910GM chipset/ Intel Celeron M CPU with 600 MHz, 512KB L2-Cache and 400 MHz FSB/ 512MB RAM



Options

PCI_087412	1024MB Ram Upgrade (not available on 915/CM600)
PCI_068712	2048MB RAM Upgrade (not available on 915/CM600)
PCI_062579	Heatspreader (for thermal designs that will place the SBC on a cooling plate)
PCI_024873	Passive Heatsink (not recommended with 915/738 or 915/745)
PCI_088741	Active Heatsink
PCI_100.101	mini-XTX Development Cable kit
PCI_100.105	mini-XTX SATA + USB Expansion Adapter
PCI_100.110	mini-XTX mini-PCI Type III card adapter
PCI_100.120	mini-XTX Dual Express/34 card adapter
PCI_100.125	mini-XTX Dual PCI Express mini card adapter
PCI_100.130	mini-XTX PCI/104-Express card adapter
PCI_100.140	mini-XTX Prototype card adapter

Technical DATA

SBC

• Chipsets/CPUs

- See Congatec conga-X915 module specification

• I/O Interface - top

- 1x VGA (Micro-connector)
- 1x PS/2 Keyboard (Micro-connector)
- 1x PS/2 Mouse (Micro-connector)
- 2x COM Port (Micro-connectors)
- 2x USB 2.0
- 1x SATA
- 1x Ethernet 100Base-Tx Fast Ethernet
- 1x LVDS header
- 1x TV out header
- 1x Audio header
- 1x HD Audio Expansion header
- 1x +5V Power Input
- 2x SVDO

• I/O Interface - bottom

- XTX standard X1 – X4 connectors available to add adapters or custom circuitry

• Internal connectors

- Compact Flash Socket
- Battery holder for RTC backup
- Fan
- RESET button

• Embedded BIOS Features

- Congatec BIOS

• Operating Systems

- See Congatec conga-X915 module specification

• Power Consumption

- Carrier only:
5 VDC \pm 5% - 0.25 watts
- See Congatec conga-X915 module specification

• Temperature

- Operating 0 to +60°C
- Storage -20 to +80°

• Humidity

- Operating 10 to 90% r.H. non-cond.
- Storage 5 to 95% r.H. non-cond.

• Size

- Dimensions:
Width x Length: 95 x 114 mm
Height: 22.7 mm high with a standard XTX module and a heat spreader. Add 10 mm for heat sink. Add 11.1 mm for each adapter type added and 9.5mm for last bottom connectors (may be removed)

• Cooling

- Standard XTX Heat Spreaders or Heat sinks available

OPTIONS

Development Cable Kit

- 2x PN 078241 for PS2 Keyboard & Mouse
- 1x PN 047245 for VGA
- 2x PN 05764 for COM

SATA HD + 4X USB Expansion Adapter

- 1x 1.8" SATA HD socket
- 4x USB 2.0 connectors (only 2x available if a Dual Express/34 or Dual PCI Express mini are mounted)

mini-PCI Type III Adapter

- 1x mini-PCI Type III slot
- Fits up to type IIIB length (50.95 mm) boards
- Up to 4 adapters can be mounted to carrier

(more next page)

Dual Express/34 Adapter

- 2x Express/34 slots
- Only 1 adapter can be mounted to carrier ((Not available if PCI Express Mini adapter is used)

Dual PCI Express Mini Adapter

- 2x PCI Express mini slots
- Only 1 adapter can be mounted to carrier (Not available if Dual Express/34 adapter is used)

PCI/104-Express Adapter

- 1x PCI/104-Express Slot (Also adapts PC/104plus cards)
- Only 1 adapter can be mounted to carrier

Prototype Adapter

- Used to install prototype circuits.
- Includes access to all XTX signals including 3.3V and 5V.
- Multiple adapters can be mounted to carrier. Contact factory for application specific details.

